

# INTIMIDATOR™ 20XP

## 20" Capacity Whole Tree Chipper

Bandit's smallest drum-style whole tree chipper is extremely capable with a large 24-½" x 26-¼" throat opening and engine options exceeding 300 horsepower. The Bandit Intimidator™ 20XP is great for companies seeking a cost-effective machine with the capabilities of a whole tree chipper, but in a smaller package that's easier to tow and maneuver.

### DURABLE AND POWERFUL.

- Easily processes large trees and limbs
- Massive 24-½" x 26-¼" chipper opening
- Heavy-duty construction for years of dependable service



### Chip Large Limbs And Trees With Limited Prep

The Intimidator 20XP easily handles tops and forked limbs because of the chipper's large throat opening and Bandit's proven Slide Box Feed System. This system features a powerful top feed roller that is 32" wide by 15-¾" in diameter, and a bottom feed wheel roller that is 32" wide by 10-5/8" in diameter. The feed rollers are positioned within inches of the chipping knives, effectively controlling even the wildest trees and branches. This reduces trimming time and labor costs while increasing production.

### Crush And Compress Material Quicker

Limby whole trees are chipped quickly and efficiently by the Intimidator 20XP with virtually no prep work required. The wide chipper opening and sloped infeed system helps to crush, compress and funnel limby whole trees into the feed system, making it easy to feed and process stubborn material that rival chippers struggle to handle. And with aggressive engine options over 300 horsepower, the Intimidator 20XP has plenty of power to tackle big projects.

### Efficient Production

The synchronized feed system never underfeeds the drum or forces material against it. The chip discharge system includes deep knife pockets, a smooth transition / discharge chute and the patented Power Slot, discharging chips while using much less energy. This also significantly reduces idle time due to the more productive chipper infeed system.

### Significantly Less Maintenance

The Intimidator 20XP has a heavy, reinforced drum with more internal support. The drum, feed system and related Bandit components should last the lifetime of the chipper and are backed by a five-year GUTS warranty. Solid welded construction with heavy-duty materials throughout the Intimidator 20XP help ensure long life and trouble-free performance with less downtime for maintenance.

### More High-Quality Chips Per Load

The Intimidator 20XP throws chips with more force due to the pocket design, smooth transition, smooth discharges and the patented Power Slot. This impressive machine has been known to fill 40' semi-trailers in 45 minutes, and with Bandit's legendary chip throwing power you'll pack more chips per load. Chips from Bandit chippers have better uniformity compared to rival machines and often preferred by mills and biomass producers.



# Bandit INDUSTRIES, INC.

6750 Millbrook Rd. • Remus, MI 49340 • 1-800-952-0178

FIND US ONLINE



WWW.BANDITCHIPPERS.COM

# Intimidator™ 20XP

20" capacity drum-style whole tree chipper

## REMOTES

Standard on 20XP.




# Intimidator™ 20XP

20" capacity drum-style whole tree chipper



## POWER OPTIONS

CHOOSE BETWEEN ELECTRIC MOTORS OR DIESEL ENGINES TO POWER THE INTIMIDATOR 20XP IN ANY APPLICATION.

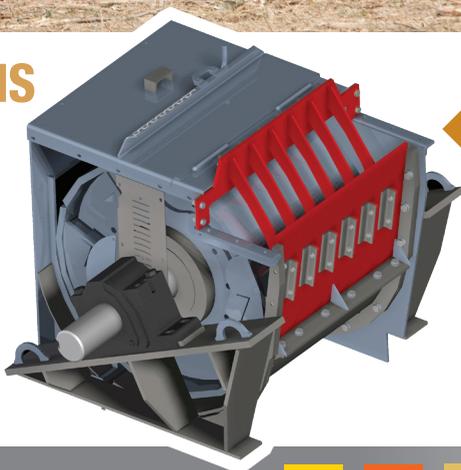

## CARD BREAKER

The Card Breaker works by breaking apart chips as they enter the discharge chute into a more uniform chip.

The Card Breaker can be quickly removed if larger chip sizes are needed.

# Intimidator™ 20XP Specifications

## ENGINES

- Engine Options:
- 275 HP CAT
  - 300 HP John Deere
  - 315 HP Volvo
  - 321 HP CAT
  - 350 HP John Deere
  - 350 HP Cummins

## MEASUREMENTS:

	Towable:	Track:
Length:	19' 6"	18' 4"
Width:	8'	8' 6"
Height:	10'	10' 2"
Weight:	16,120 lbs	21,000 lbs
Fuel Tank:	60 Gallon	50 Gallon
Hydraulic Tank:	30 Gallon	50 Gallon

## OTHER SPECIFICATIONS:

Capacity:	20"
Throat Opening:	24-1/2" x 26-1/4"
Feed Rate:	100 FPM - 5/8" chip
Feed System:	Slide Box System
Drum:	37" diameter x 24" wide (1/2" thick)
RPM:	1,073
Auto Feed:	Standard
Drive:	5VF Kevlar Belts (3)
Adjustable Springs:	2 - 17"
Horizontal feed wheels:	32"
Displacement (CID):	63.9 / 14.5
Hydraulic Motors:	2
Discharge:	Hydraulic controlled 270° swivel discharge chute with 33" elbow radius
Deflector:	Hydraulic controlled 12" chip deflector
Frame:	1/2" x 4" x 12" rectangular tubing

\*Weight varies, based on options selected



## Paint Colors

Choose from six standard colors, or select a custom color to match your fleet.

